

# Dual Handle Mono Tap

Product Finish: Brushed Nickel

Product code: 368601  
EAN13 barcode: 5060344154048




## Product features:

- Metal construction throughout
- Quarter turn handle action for precise flow control
- Supplied complete with flexible tail pipes for fast simple fitting
- Modern minimalism with flair
- Antisplash spout supplied as standard

## Additional information / Parts included:

Includes triangular stabilising bracket, 2.0 & 2.5mm A/F Allen key

## Product dimensions:

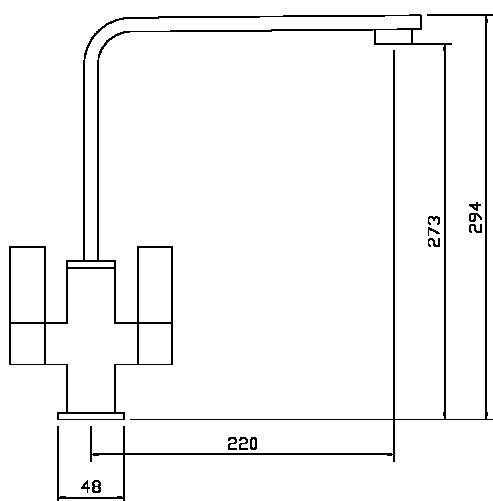

- Overall Height / projection: 294 mm
- Exit reach: 220 mm
- Exit height: 273 mm
- Centre distance(s): n/a


- Base diameter(s): 48 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 45 mm

- Spout diameter: 30 x 10 mm
- Spout aerator size: M24

## Packaged properties:

- |                         |                      |
|-------------------------|----------------------|
| Box length: 420mm       | Box depth: 70mm      |
| Box width: 340mm        | Units per outer: 5   |
| Tap only weight: 1.38kg | Boxed weight: 1.98kg |

## Product flow characteristics:

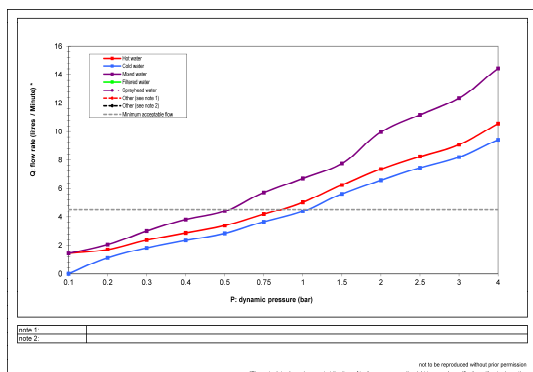

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 12.36

- Control valve type: M20 ceramic disc, quarter turn operation
- Product flow characteristics: Single flow
- Non return valve(s): Cold only

- Aerator type: Honeycomb Aerator
- Spout connection method: Grub screw

- Tail pipe inlet / outlet size: M10 / 1/2" Male (cold), 1/2" Female (hot)
- Inlet pipe type / length: flexible stainless braided hose / 370 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year