


Product Finish: Brushed nickel	Product code: AT1016
	EAN13 barcode: 5060048380156



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Elegant retro design form
- Quarter turn handle action for precise flow control
- Custom designed for lower to mid pressures
- Metal construction throughout with ABS base plinth
- Metal construction throughout with ABS base plinth

Additional information / Parts included:

Packaged properties:	Tap only weight: 1.544kg
Box length: 420mm	Boxed weight: 1.99kg
Box width: 240mm	
Box depth: 75mm	
Units per outer: 5	


Product dimensions:

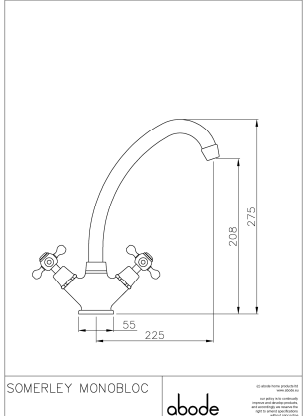

SOMERLEY MONOBLOC
abode


- **Overall Height / projection:** 275 mm
- **Exit reach:** 225 mm
- **Exit height:** 208 mm
- **Centre distance(s):**
- **Base diameter(s):** 55 mm
- **Reccomended hole diameter:** Ø 35 mm
- **Max. surface depth:** 20 mm
- **Spout diameter:** 22 mm
- **Spout aerator size:** n/a

Product flow characteristics:

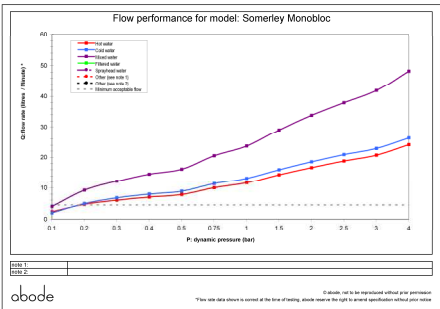

Flow performance for model: Somerley Monobloc

- **Min / Max water pressure:** 0.20 / 5.5 bar
- **Reccomended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 41.80
- **Control valve type:** Ceramic disc QT
- **Product flow characteristics:** Dual flow
- **Non return valve(s):** No, none required
- **Aerator type:** None
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Locking collar
- **Tail pipe inlet / outlet size:** M12 / 15mm Ø
- **Inlet pipe type / length:** copper rigid tube / 245 mm

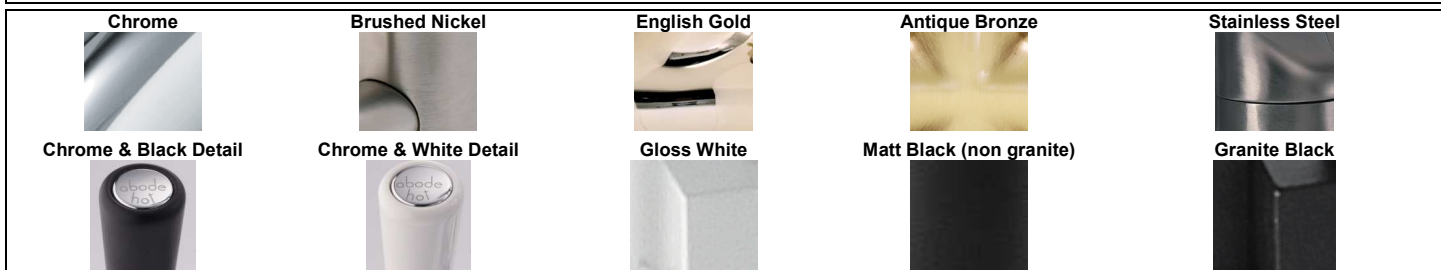

<p>Care instructions summary:</p> <ul style="list-style-type: none"> • Clean the mixers and showers regularly as required, using soap, do not use any other cleaners. • Regular cleaning will prevent the build up of lime scale and dirt • After cleaning rinse thoroughly with clean water to remove any cleaner residue • Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives 	<p>Warranty Summary (Full details available on request):</p> <ul style="list-style-type: none"> • Materials and workmanship defects warranted for 5 years • Valves and working parts warranted for 2 years • Surface warranty defects warranted for 1 year • O-rings, hoses & gaskets warranted for 1 year
--	---