abode

Indus single lever

Product Finish:	Chrome	**Product code:**	AT1087
		EAN13 barcode:	5060048380866

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.
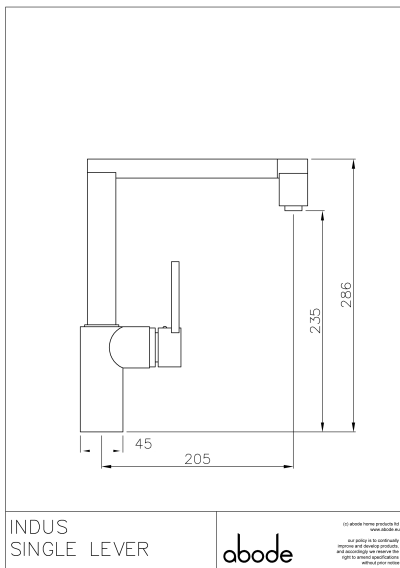
Product features:

• Metal construction throughout

• Luscious European quality chromium plate finish

• A modern design classic style

• Single lever control for effortless single handed control

• Leading design performance requiring higher pressures

Additional information / Parts included:

2mm a/f Allen key included, dual fixing studs, head tilts 30°

Product dimensions:

INDUS
SINGLE LEVER

abode

• **Overall Height / projection:** 286 mm
• **Exit reach:** 205 mm
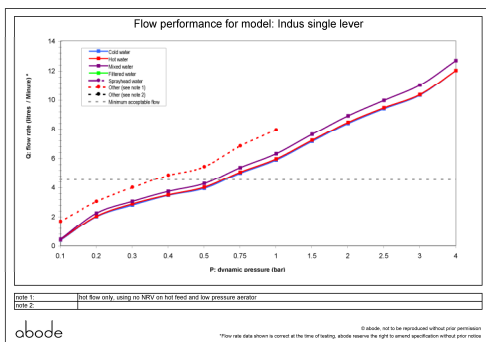• **Exit height:** 235 mm
• **Centre distance(s):**

• **Base diameter(s):** 45 mm
• **Recommended hole diameter:** Ø 35 mm
• **Max. surface depth:** 45 mm

• **Spout diameter:** n/a mm
• **Spout aerator size:** 18m

Packaged properties:

Box length: 420mm	**Box depth:** 75mm
Box width: 240mm	**Units per outer:** 5
Tap only weight: 2.54kg	**Boxed weight:** 3.24kg

Product flow characteristics:

• **Min / Max water pressure:** 0.50 / 5.5 bar
• **Recommended / Max water temperature:** 46°C / 70°C
• **Part G - Mixed flow rate at 3 bar (litres / min):** 11.00

• **Control valve type:** Single lever ceramic cartridge
• **Product flow characteristics:** Single flow
• **Non return valve(s):** Hot & cold (integral to tails)

• **Aerator type:** Plastic mesh diffuser & flow straightener
• **Accepts revolve / spray areator:** No
• **Spout connection method:** Grub screw

• **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Male
• **Inlet pipe type / length:** flexible stainless braided hose / 270 mm

Care instructions summary:
• Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
• Regular cleaning will prevent the build up of lime scale and dirt
• After cleaning rinse thoroughly with clean water to remove any cleaner residue
• Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):
• Materials and workmanship defects warranted for 5 years
• Valves and working parts warranted for 5 years
• Surface warranty defects warranted for 1 year
• O-rings, hoses & gaskets warranted for 1 year

01/08/2014 - This sheet is a summary of the product information full details are available on request, errors & omissions excepted.

www.abode.eu