

Product Finish: Chrome

Product code: AT1200
EAN13 barcode: 5060048382952



Product features:


- Metal construction throughout
- Quarter turn handle action for precise flow control
- Thermostatic temperature indicating LED ring on tap base
- Supplied with both UK and European plug
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabiliser and mains transformer, tap remaining light for a short period after use

Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product dimensions:

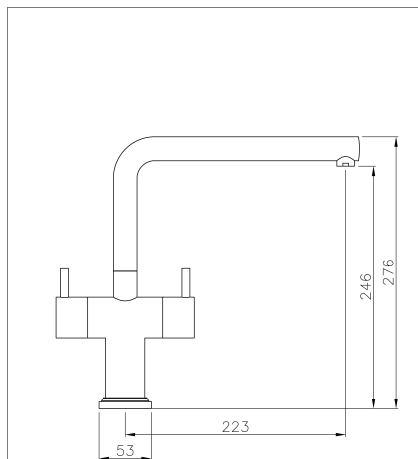

- Overall Height / projection: 276 mm
- Exit reach: 223 mm
- Exit height: 246 mm
- Centre distance(s):

- Base diameter(s): 53 mm
- Recommended hole diameter: Ø 35 mm
- Max. surface depth: 30 mm

- Spout diameter: 24 mm
- Spout aerator size: 18mm

Packaged properties:


- | | |
|-------------------------|----------------------|
| Box length: 435mm | Box depth: 70mm |
| Box width: 340mm | Units per outer: 5 |
| Tap only weight: 1.58kg | Boxed weight: 2.47kg |

AURORA
MONOBLOC



© abode home products ltd
www.abode.eu
No liability for copyright
infringement or other
damages or for any loss
of profits or other
consequential
damages.

Product flow characteristics:

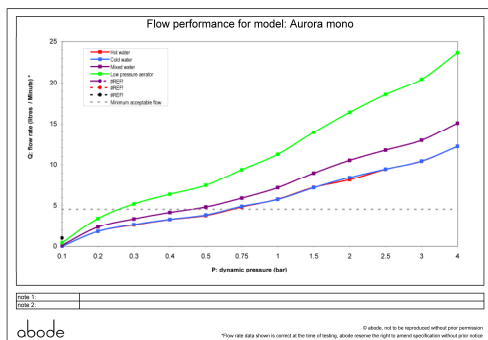

- Min / Max water pressure: 0.50 / 5.5 bar
- Recommended / Max water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 12.96

- Control valve type: Ceramic disc QT
- Product flow characteristics: Single flow
- Non return valve(s): Hot & cold (integral to tails)

- Aerator type: Plastic mesh diffuser
- Accepts revolve / spray areator: No
- Spout connection method: One way snap fit

- Tail pipe inlet / outlet size: M10 / 1/2" BSP Male
- Inlet pipe type / length: flexible stainless braided hose / 245 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year